

1.Platform

<http://18gps.net>

2.GPRS Setting

For use platform,please set the TK102-2 as follow:

ADMINIP123456 IP PORT; set platform IP, port
APN123456 APN set APN
T060S***N123456 set auto tracking,"o60s" can be changed
GPRS123456 set GPRS mode


If in the country need APN user Name,APN user password,the setting as follow:

ADMINIP123456 IP PORT;	set platform IP, port
APN123456 APN username userpassword password	set APN,APN user name,APN user
T060S***N123456	set auto tracking,"o60s" can be changed
GPRS123456	set GPRS mode

Example for use our platform:

adminip123456 112.124.25.181 7018
apn123456 claro.com.br claro claro
t060s***n123456
gprs123456

3.Login

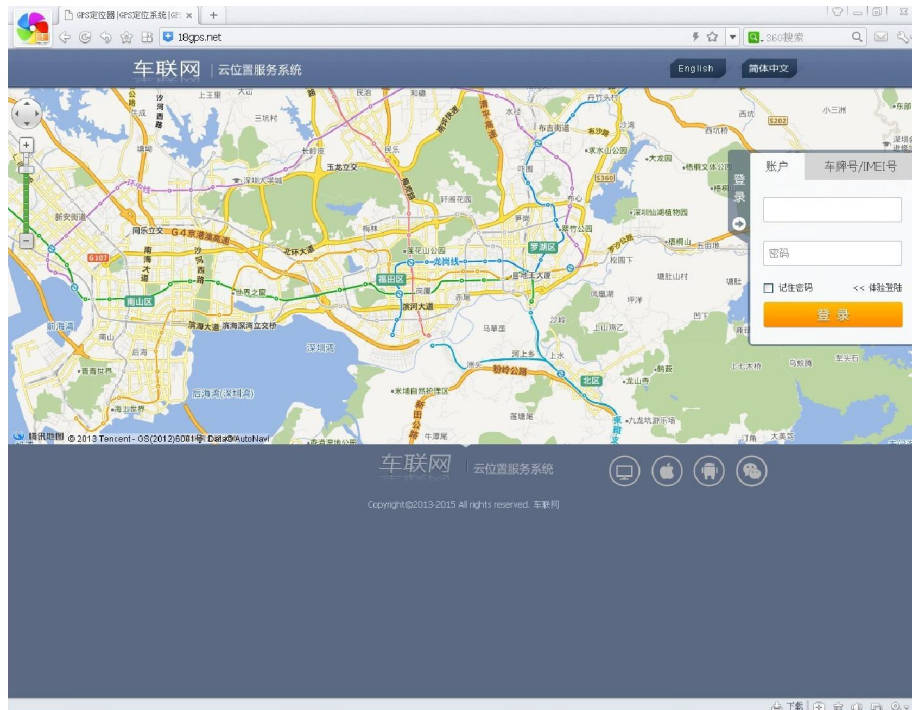

Choose language



Choose Plate NO./IMEI



Login as:

0+IMEI last 11bit numbers

Example:

IMEI:355227042128041

Login as:027042128041

The default Password:

123456

Remark: The platform free use for 1 year.